


- GENERAL ELEVATION NOTES:**
1. TYPICAL 4" FACE BRICK VENEER. BRICK COLOR (TYPICAL) - Match Existing
 2. PLEASE NOTE THAT ALL BRICK SHALL BE SEALED WITH WATER REPELLANT AFTER CLEANING - SEE SPECS.
 3. SEE WALL SECTIONS AND DETAILS FOR RELATED INFORMATION & DIMENSIONS
 4. TYPICAL METAL ROOF - SLOPE 3" per FOOT EXISTING ROOF, FASCIA, FLUSH PANEL, TRIM, etc SHALL BE PAINTED - SEE SPECS. SEE ALTERNATES FOR REPLACEMENT OF EXISTING. NEW ROOF SHALL BE STANDING SEAM METAL PANEL SYSTEM - SEE SPECS
 5. GC SHALL PROVIDE LOUVERS BUT SHALL COORD. SIZE WITH MECHANICAL CONTRACTOR PRIOR TO ORDERING.
 6. EXTERIOR EXPANSION JOINTS () SEE FLOOR PLAN ALSO
 7. CONTRACTOR SHALL CONSTRUCT CRICKETS ABOVE AND ALL VTRS, EXH FANS, ATTIC FANS, ETC..

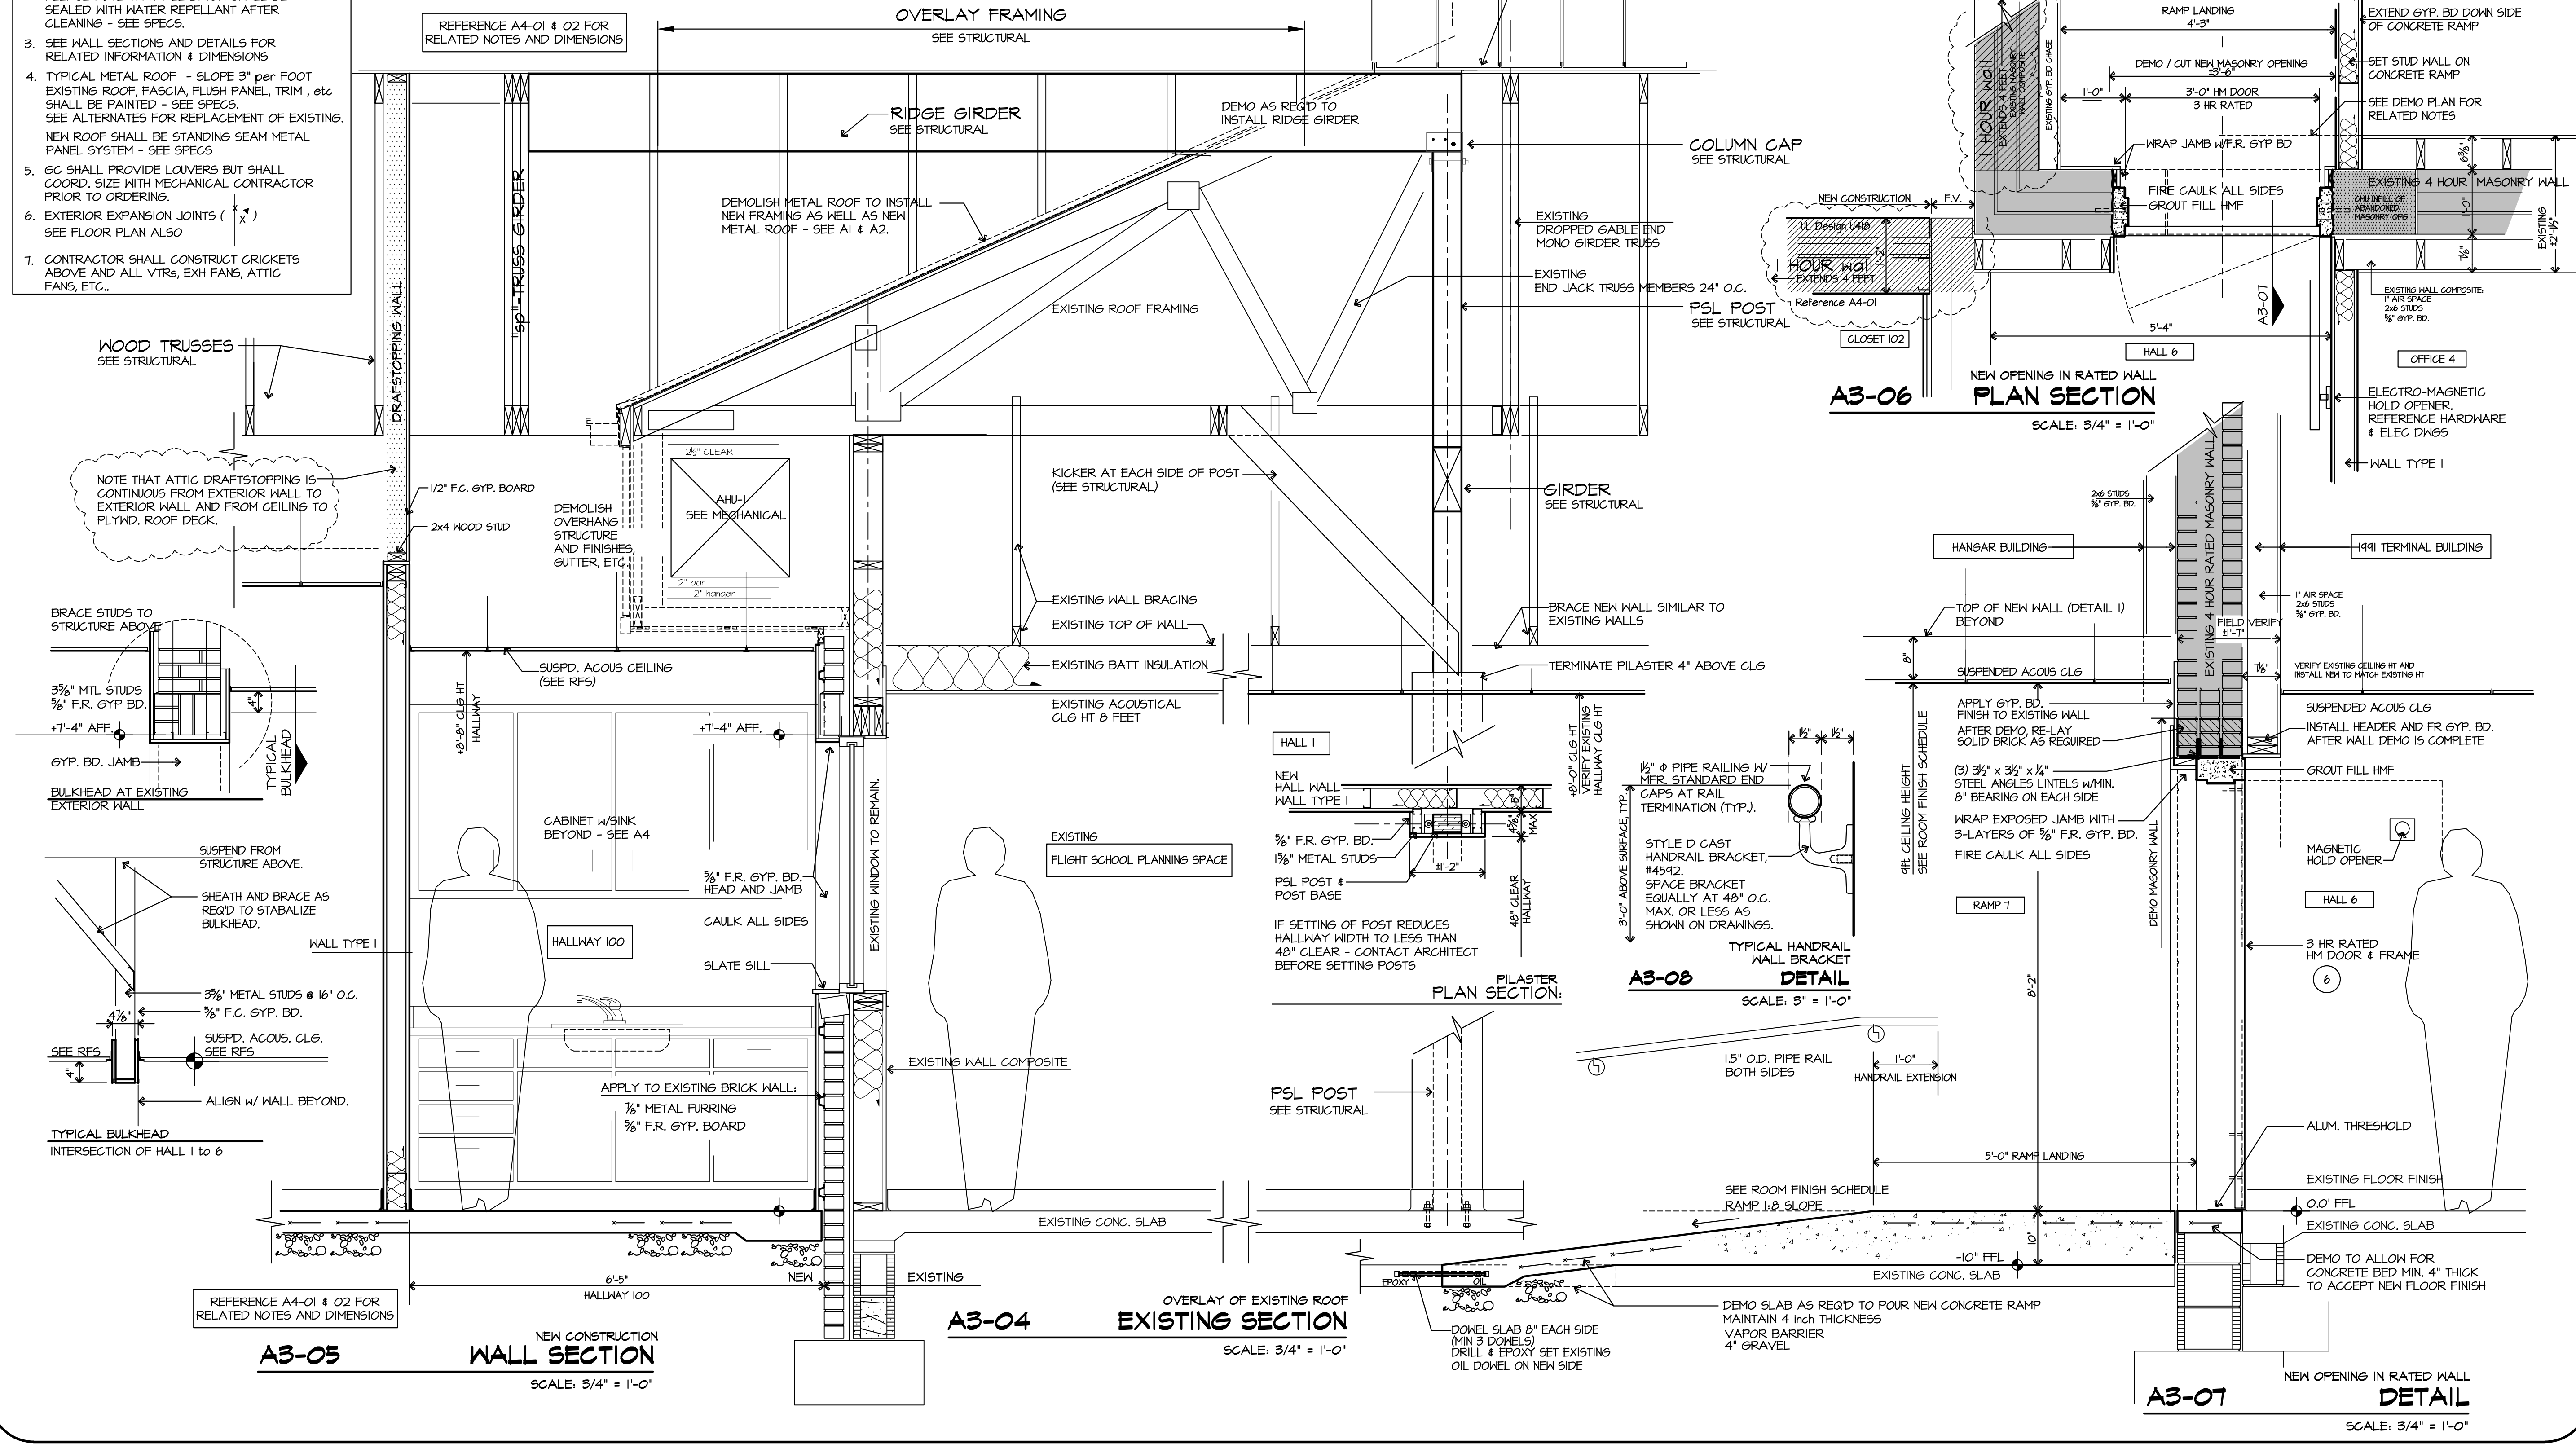

**ELEVATIONS
and
SECTIONS**

**ROWAN COUNTY
AIRPORT**

TERMINAL EXPANSION

